


FRONT VIEW

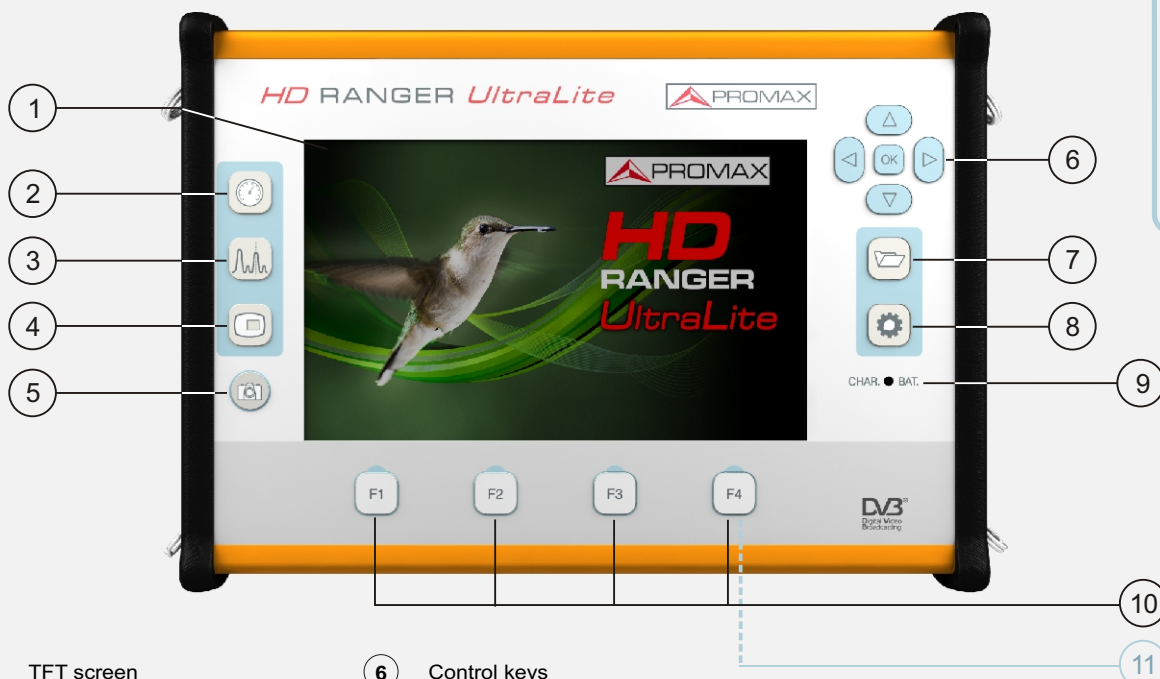

Trademark of the DVB - Digital Video Broadcasting Project

- | | |
|---|--------------------------------|
| ① TFT screen | ⑥ Control keys |
| ② Measurement key | ⑦ Installations management key |
| ③ Spectrum key | ⑧ Settings key |
| ④ TV Key | ⑨ Battery charging indicator |
| ⑤ Export (press>1s)
Reference (press<1s) | ⑩ Softkeys |
| | ⑪ Reset (press and hold 5s) |

SCREEN ICONS REFERENCE

STATUS BAR

- Battery charging**
- Battery not charging.** Yellow level indicates charge left
- USB in serial port mode**
- Satellite band**
- Current voltage, 22 kHz signal and LNB power level**
- Terrestrial band**
- USB flash drive inserted**
- Current installation**
- Compressed installation**
- SatCR (SCD/EN50494) commands enabled**
- JESS (SCD2/EN50607) commands enabled**
- Task scheduled**
- Control keys multi-function enabled**
Two-letter code indicates the exact function:
 - FR** Frequency tuning
 - CH** Channel tuning
 - SP** SPAN change
 - MK** Marker moving
 - EC** Echo change/zoom

SERVICE LIST SELECTOR

- Digital TV service**
- HD High Definition TV service**
- Digital radio**
- Data**
- Scrambled service**

DIALOG BOXES

- Error message**
- OK message**
- Question message**
- Warning message**

VIDEO & AUDIO SETTINGS MENU

- TFT backlight brightness**
- Volume**


SWITCHING ON / OFF

Slide, hold for a few seconds and drop the lateral ON/OFF slide switch.






MEASUREMENT

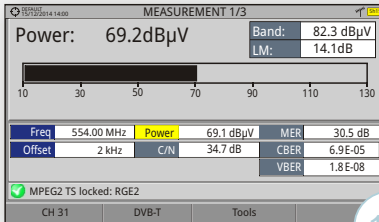


FULL MEASUREMENT

1/3

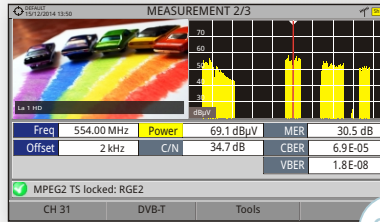

MEASUREMENT + TV + SPECTRUM

2/3

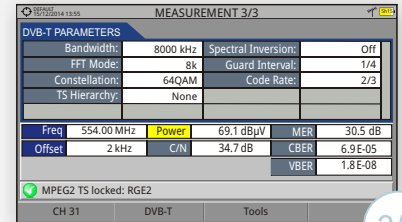


MEASUREMENT + PARAMETERS

3/3




SPECTRUM ANALYSER

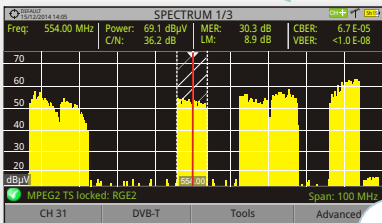


SPECTRUM + MEASUREMENT

1/3

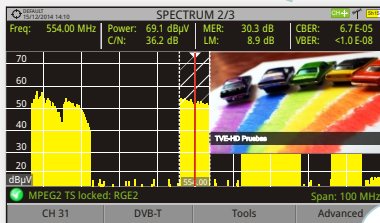

SPECTRUM + MEASUREMENT + TV

2/3

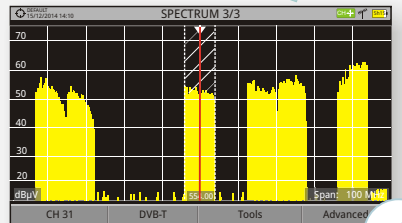


FULL SPECTRUM

3/3




TV MODE

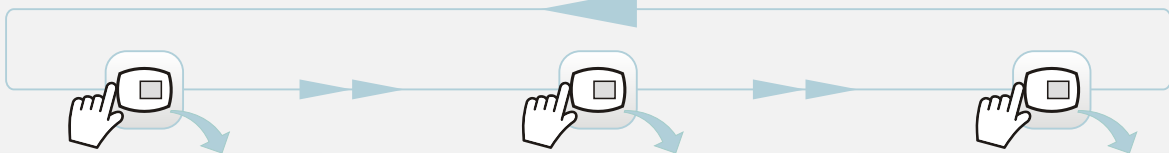


FULL TV

1/3

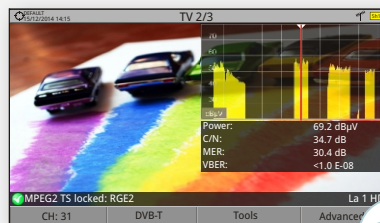

TV + SPECTRUM + MEASUREMENT


2/3

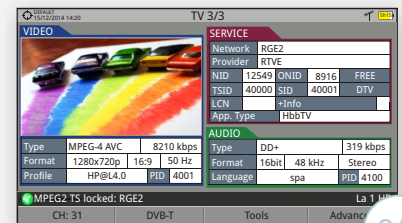


TV + SERVICE DATA

3/3

CONTROL KEYS

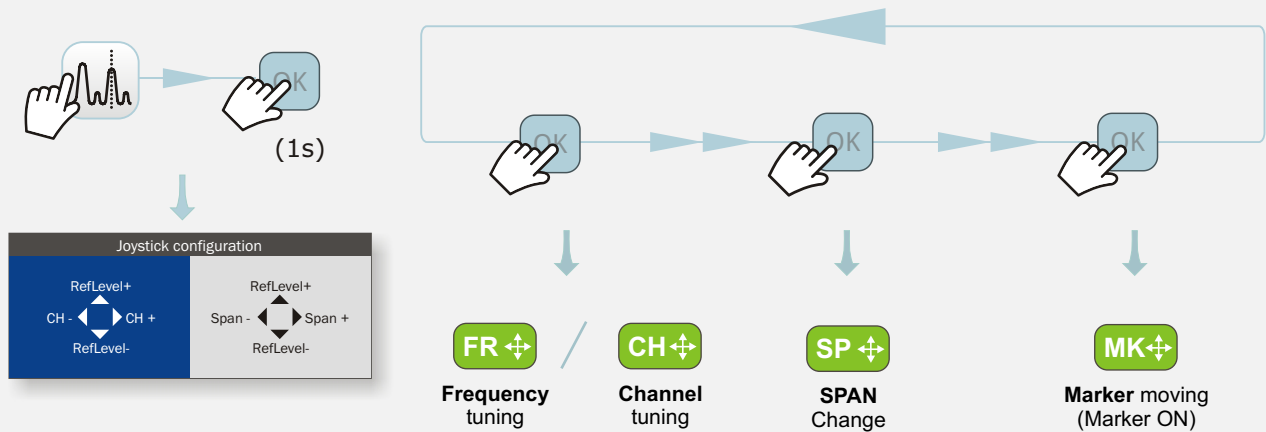


EXPORT*

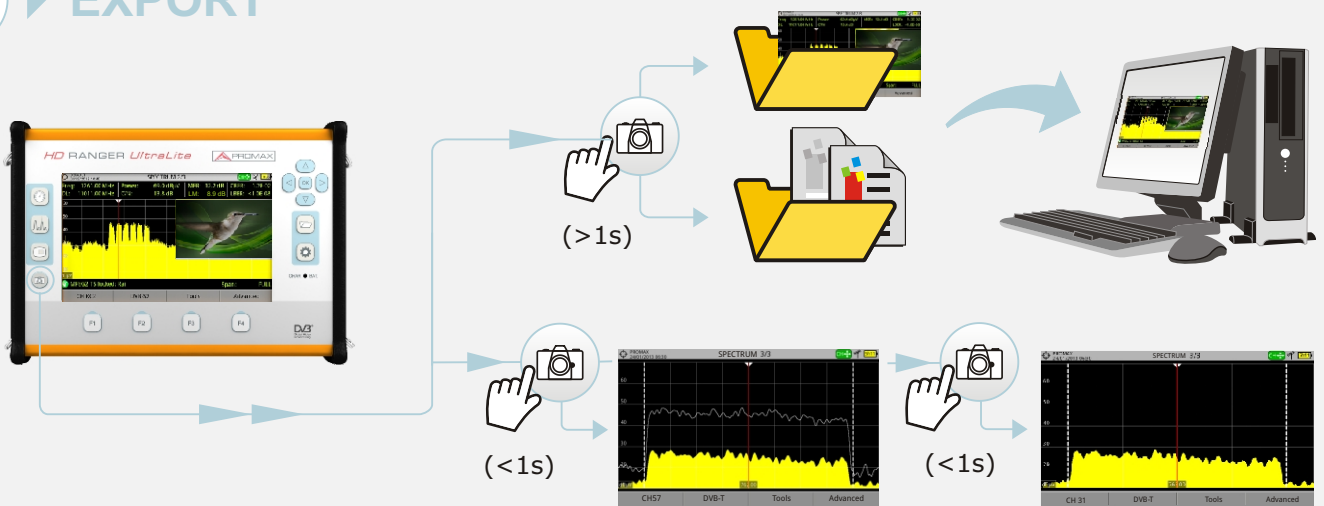


*Export settings in Preferences


INSTALLATIONS MANAGEMENT

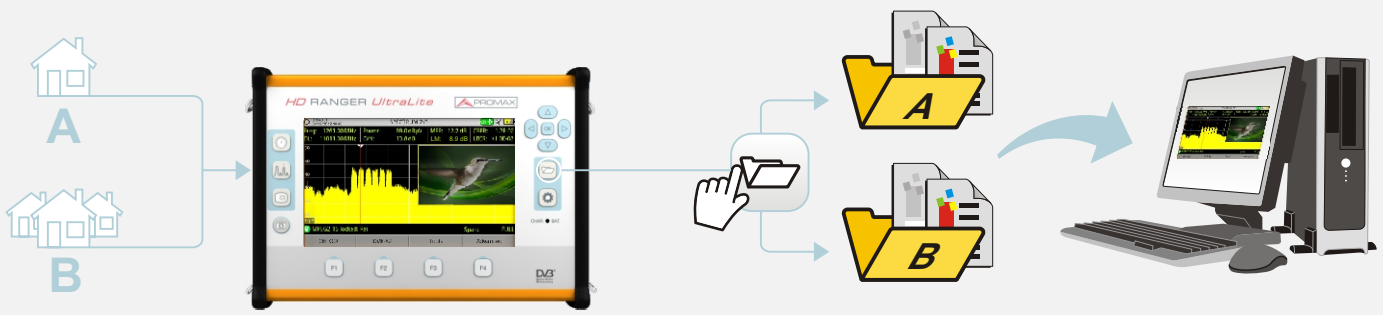

SPECTRUM ANALYSER MENU

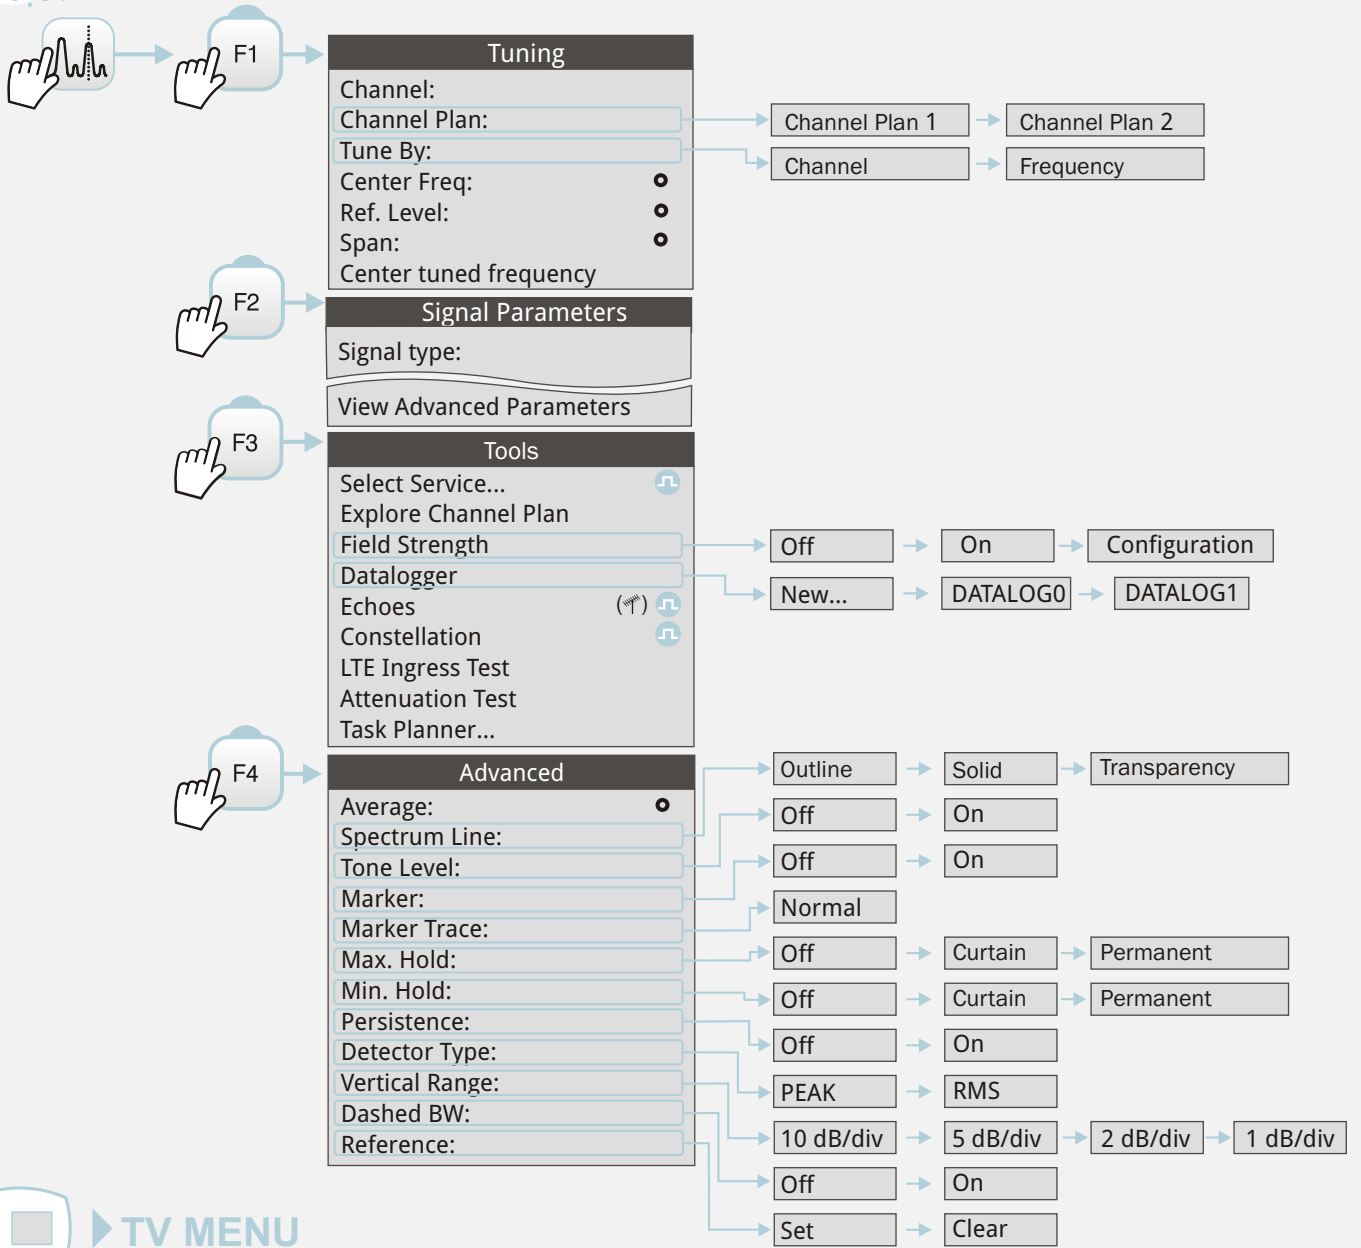

TV MENU

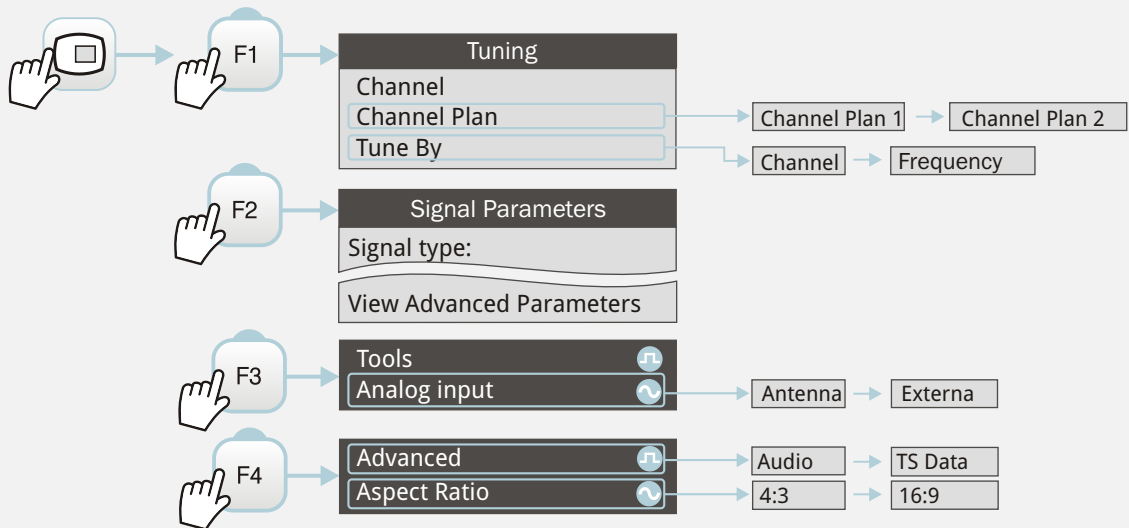

Option available for **terrestrial band**


Option available for **satellite band**

Only available for **digital channels**

Only available for **analog channels**



UP



DOWN



LEFT



RIGHT



VALIDATE

PARAMETER EDITION

The diagram illustrates the process of editing the Center Frequency parameter in the Tuning menu through six sequential steps:


- Step 1:** Press the **F1** function key to enter the **Tuning** menu. The menu shows: Channel: 44, Channel Plan: CCIR, Tune By: Channel, Center Freq: 658.00 MHz.
- Step 2:** Press the **DOWN** arrow key three times (indicated by 'x3') to highlight the **Center Freq: 658.00 MHz** field.
- Step 3:** Press the **OK** button and the **VALIDATE** icon to enter edit mode. The **Center Freq: 658.00 MHz** field is highlighted in yellow.
- Step 4:** Press the **LEFT** arrow key to move the cursor to the right of the decimal point.
- Step 5:** Press the **UP** arrow key to change the digit from 0 to 1.
- Step 6:** Press the **OK** button and the **VALIDATE** icon to confirm the change. The final **Center Freq: 658.10 MHz** is highlighted in blue.

PARAMETER SELECTION


The diagram illustrates the process of selecting the Spectrum Line parameter in the Advanced menu through five sequential steps:

- Step 1:** Press the **F4** function key to enter the **Advanced** menu. The menu shows: Average: 0, Spectrum Line: Outline, Tone Level: Off.
- Step 2:** Press the **DOWN** arrow key to highlight the **Spectrum Line: Outline** option.
- Step 3:** Press the **OK** button and the **VALIDATE** icon to open the selection sub-menu. The sub-menu options are: Outline, Solid, and Trans.
- Step 4:** Press the **DOWN** arrow key to highlight the **Solid** option in the sub-menu.
- Step 5:** Press the **OK** button and the **VALIDATE** icon to confirm the selection. The final **Spectrum Line: Solid** is highlighted in blue.


INSTALLATIONS MANAGEMENT

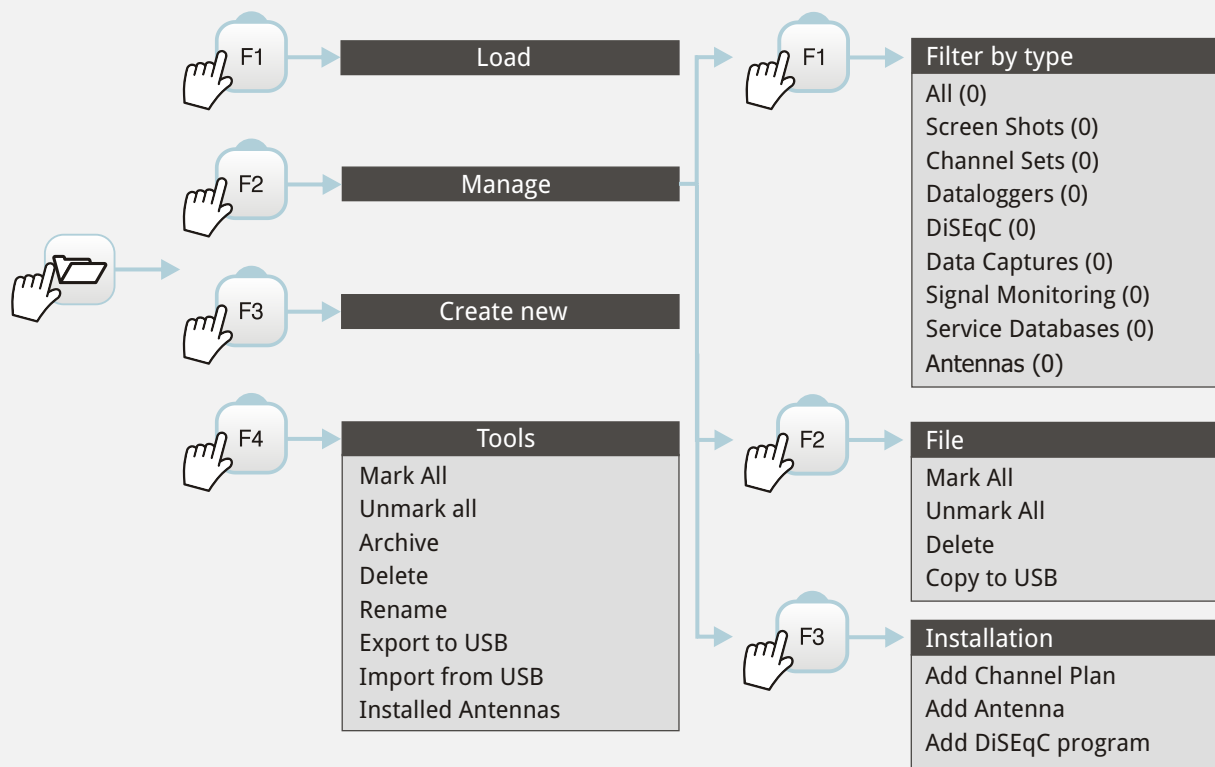


PREFERENCES MENU

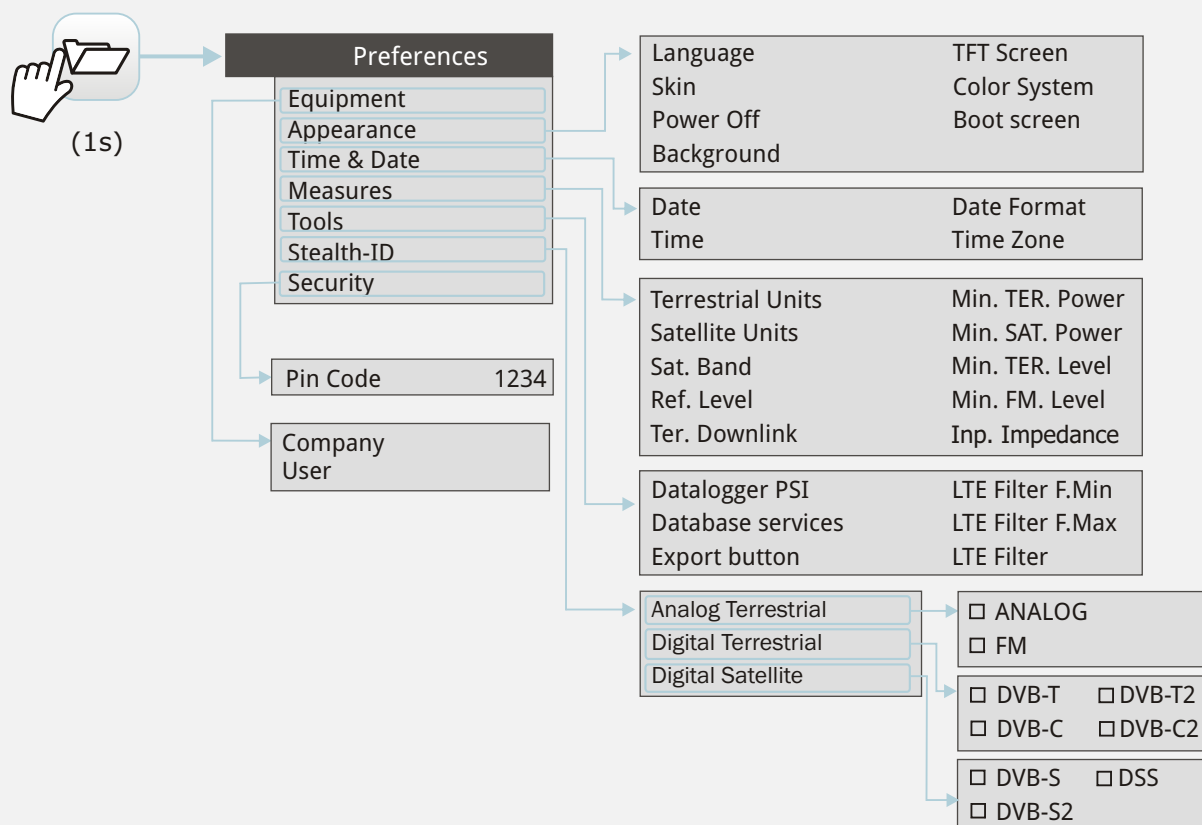


SETTINGS MENU

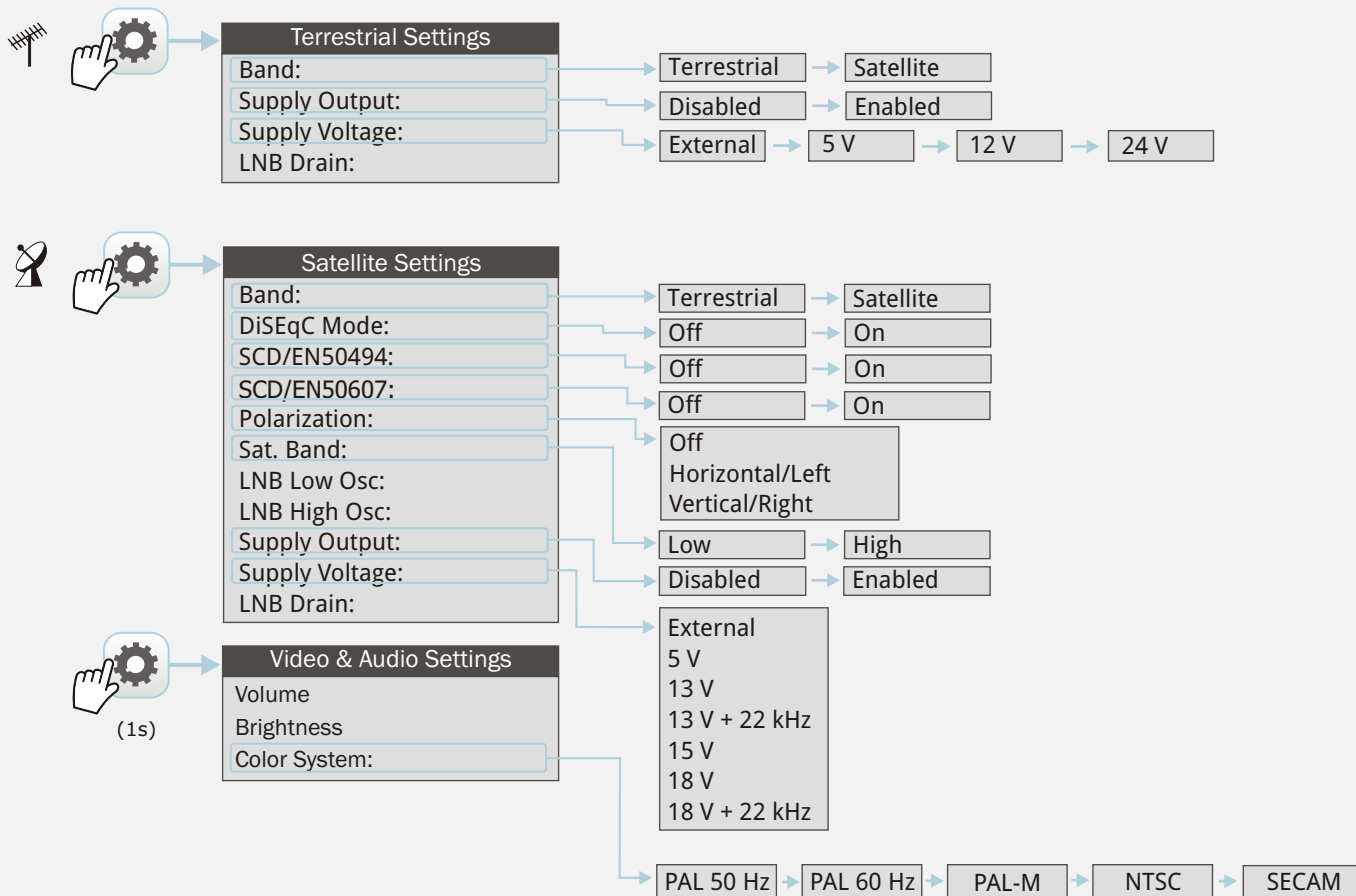

MEASUREMENT MENU

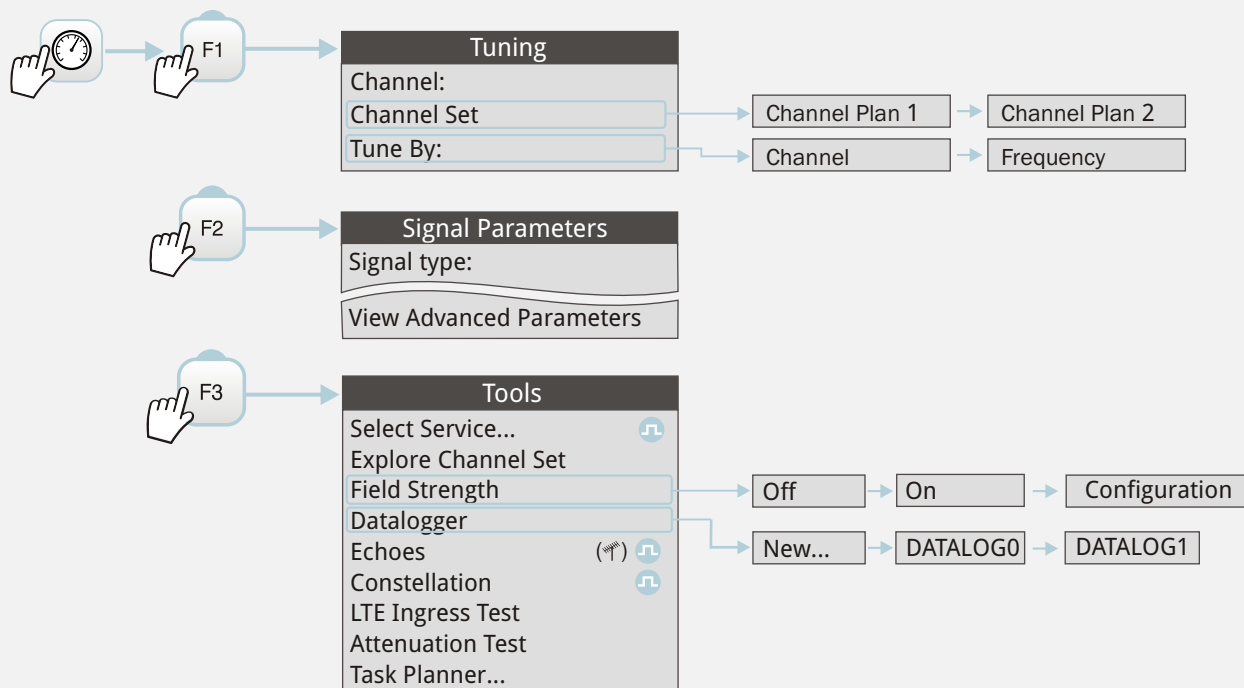

LEFT SIDE VIEW

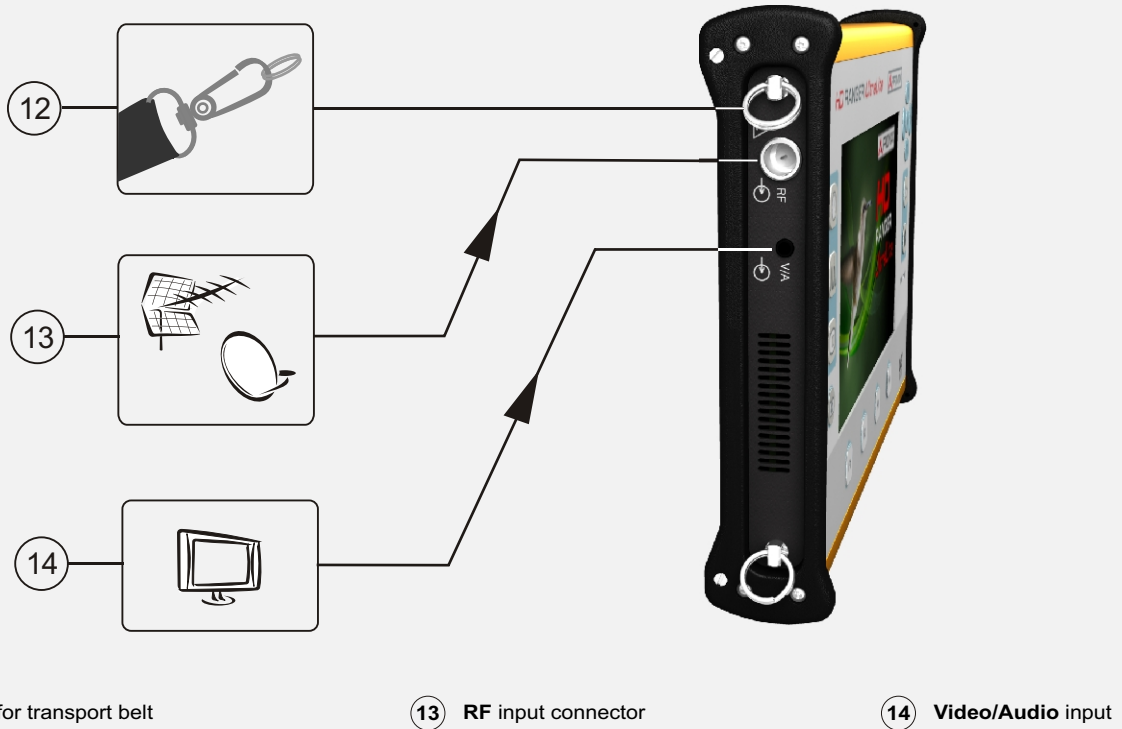


12 Keyring for transport belt

13 RF input connector

14 Video/Audio input

RIGHT SIDE VIEW

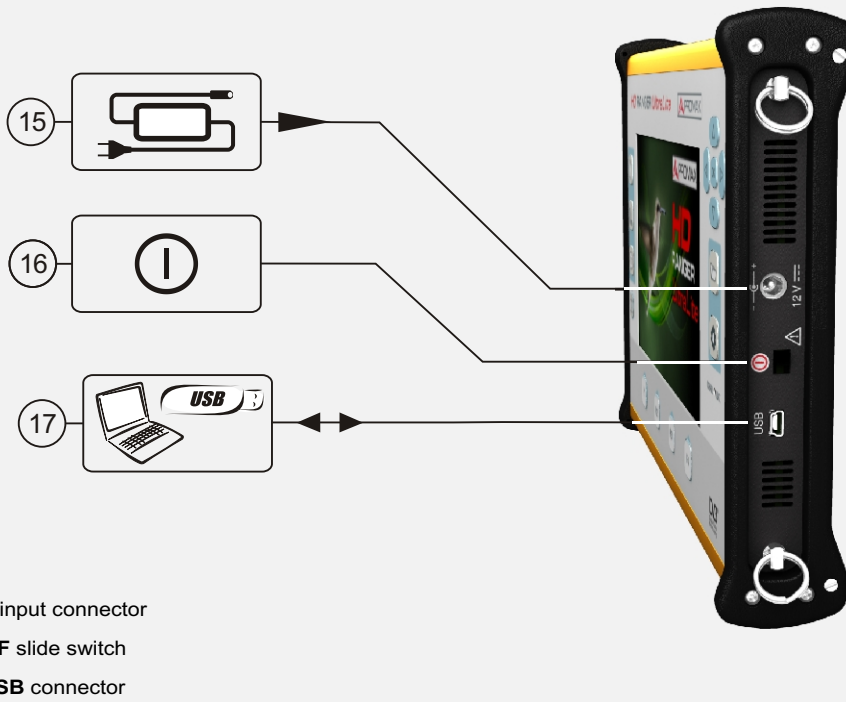

15 Power input connector

16 ON/OFF slide switch

17 Mini-USB connector

