


8GHz RF EMF Strength Meter

High Frequency measurement for EMF
Monitor high frequency radiation in the 10MHz
to 8GHz frequency range

Features:

- For electromagnetic field strength measurement including mobile phone base station antenna radiation, RF power measurement for transmitters, wireless LAN (Wi-Fi) detection/installation, wireless communication applications (CW, TDMA, GSM, DECT) and microwave leakage
- Measurement optimized for 900MHz, 1800MHz, 2.7GHz, 3.5GHz and 8GHz
- Non-directional (isotropic) measurement with three-channel (triaxial) measurement probe
- Max Hold and Average functions
- Manual store/recall up to 99 sets
- Level exceed audible alarm with user selectable threshold
- Complete with 9V battery and carrying case

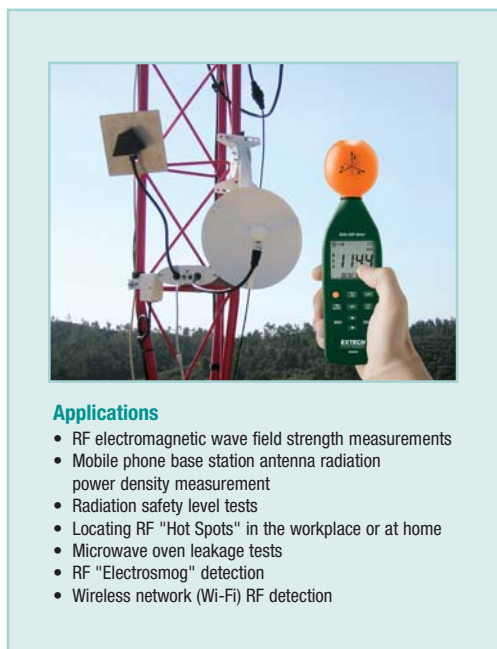

Applications

- RF electromagnetic wave field strength measurements
- Mobile phone base station antenna radiation power density measurement
- Radiation safety level tests
- Locating RF "Hot Spots" in the workplace or at home
- Microwave oven leakage tests
- RF "Electrosmog" detection
- Wireless network (Wi-Fi) RF detection

| Specifications | |
|------------------|--|
| Sensor Type | Electric Field |
| Frequency Range | 10MHz to 8GHz (optimized for 900MHz, 1800MHz, 2.7GHz, 3.5GHz & 8GHz) |
| Units of Measure | mV/m, V/m, μ A/m, mA/m, μ W/m ² , mW/m ² , W/m ² , μ W/cm ² , mW/cm ² |
| Measuring Ranges | 20mV/m to 108.0V/m |
| | 53 μ A/m to 286.4mA/m |
| | 1 μ W/m ² to 30.93W/m ² |
| | 0 μ W/cm ² to 3.093mW/cm ² |
| Resolution | 0.1mV/m, 0.1 μ A/m, 0.1 μ W/m ² , 0.001 μ W/cm ² |
| Audible Alarm | Adjustable threshold with On/Off |
| Memory | Manual store/recall of 99 sets |
| Dimensions | 2.6x2.4x9.7" (67x60x247mm) |
| Weight | 8.8oz (250g) |

Distributed by:

testoon
test and measurement equipment

99, rue Beranger
92320 Chatillon - France
Tel : +33 (0)1 71 16 17 00
Fax : +33 (0)1 71 16 17 03
www.testoon.com



Ordering Information:

480846RF Electromagnetic Field Strength Meter